

# 4K - UHD

## Video Wall Controller




### 4K-UHD FPGA VIDEOWALL CONTROLLER



## Hardware Based Design

High performance video processing equipment with ★ hardware architecture design.

- No more computer high-end specification.★
- No more high-end GPU Card.★
- No more licenses.★
- No more blue-screen OS crash.★
- No more viruses and black screen.★
- No more ransomwares, lost data.★
- Support up to 72 input x 72 output.★

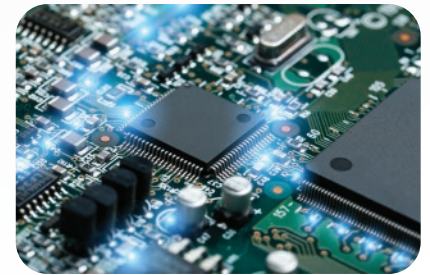

## FPGA Dedicated Chipset

Dedicated Field Programmable Gate Array (FPGA) chipset is a combination of processing unit that dedicated in video processing. This eliminated the limitation of a CPU or a GPU from conventional Software or PC controller.

Without the use of PCI - Express card, the unit can work flawlessly when adding or editing the total layout of the videowall set up. As each of the FPGA chip is working independently, user can replace or add new input/output card to customize their system.


## Module design with Hot Swap

Multiple form of connections for client to custom fit their system. Client can now combine HDMI - DVI - VGA - HDBaseT & IP Streaming in one total solution, maximizing system integration.

Reduce total cost of investment in both pre/post phase of expansion. Chassis also support control over Remote control, TCP/IP, RS-232 & button, further simplify the complexity of connections and management.

## Features

- **Modular design - Mix and Match**  
4 x 4 up to 72 x 72 input x output slot with mixing ports
- **Easy control with Drag & Drop**  
Customize complex layout with simple Click - Drag - Drop
- **4K Video Wall with Flexible set up**  
Support DVI-I / HDMI / 3GSDI / HDBaseT / Fiber connections.  
Support resolution up to 4K@60Hz for both input / output (HDMI)
- **Built-in Audio port**  
Support 3.5mm audio embedded and de-embedded function
- **Specialized video setting**  
Support HDMI 1.4 with HDCP 2.2 / 1.4  
Edge Shield features for Bezel pixel compensation in Video Wall setting
- **Scaling function**  
Support up/down scaling function via the DIP switch
- **Seamless Switching**  
Switching speed can reach 32Gbps

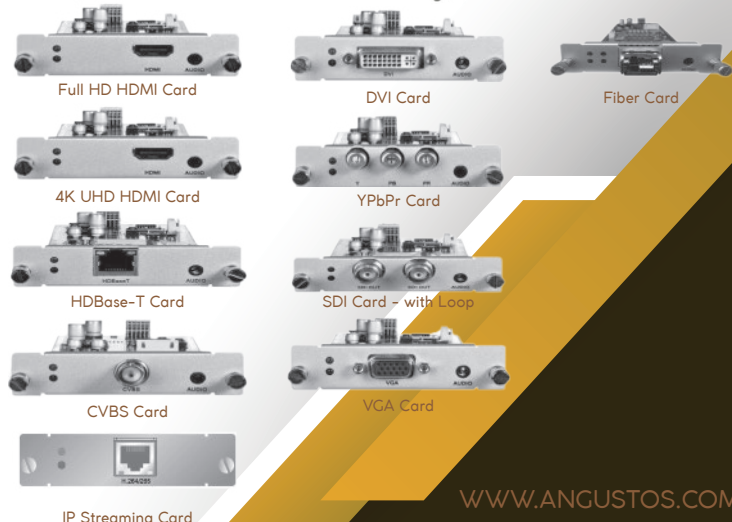

# VIDEO WALL CONTROLLER with SEAMLESS - AMC Series 72 x 72 Ultra HD Resolution - 4K@60Hz Video Wall

## Features

- Pure Hardware Structure - FPGA
- Modular Design with Video Wall.
- Seamless Switching - Flex EDID
- Multiple format I/O Card
- Mobile apps Support
- RS-232 control support
- Easy manage with TCP/IP
- Drag&Drop with Preset support
- Support Edge Shield - Benzel adjust
- Support cable up to 25m



## SPECIFICATION

Chassis size	20 U	HDCP	Support 1.3 / 1.4 / 2.2
Max. Data Rate	32 Gbps (12.5Gbps per Lane)	EDID	Auto - Program
Input Interface Port	1 to 72 (Modular)	HDMI protocol	Support up to HDMI 2.0 with audio
Output Interface Port	1 to 72 (Modular)	Resolution Input	480p up to 4096x2160 @ 60 Hz
I/O Interface Support	DVI-I / HDMI / 3G-SDI / HDBaseT VGA/Optical Fiber / CVBS / YPbPr	Resolution Output	480p up to 4096x2160 @ 60 Hz
Control	Button/IP / RS-232 / Mobile App (Option)	Scaler	Support both up/down scaling
		Power	200W, 110 ~ 260V, 50-60 Hz
		Temp / Humid	-20°C ~ + 60°C / 0% ~ 95%
		Temp / Humid Storage	-25°C ~ + 65°C / 0% ~ 95%

